

USC-360 Series

15.6" Ultra-Slim, All-in-One Computer
USC-360H with Intel® Celeron® / Core™ i3/i5;
USC-360J with Intel® Celeron® J6412;
USC-360D with Rockchip RK3568



Features

- 15.6" FHD LCD (LED backlight) with PCAP Touch
- Sleek modern designed with dual hinge stand
- Support both X86 and ARM base
- Rich peripherals for diverse applications
- Flexible installation for 2nd display
- Integrate multifunction via USB-C (video, audio, etc.)
- Support 75x75mm VESA
- Extension I/O Hub (via USB type-C)



Introduction

The USC-360 all-in-one service computer is the latest addition to Advantech's USC product family and Avalo solution offerings. Powered by an Intel® Celeron® J6412 and Rockchip RK3568 quad-core Cortex™-A55 processor that be with the most competitive cost, and energy effective platform built for retail and hospitality. USC-360 computers feature an ultra-slim form factor to ensure easy installation in diverse environments.

In addition to the 15.6" TFT LCD monitor with IP65-rated front panel that protects against water and dust ingress, USC-360 can be equipped with an optional secondary display for broadcasting product promotions and increasing consumer engagement. Overall, USC-360 computers provide flexible point-of-service (POS) computing solutions that enable retailers and service staff to optimize operations and improve customer service.

Specifications

Model	USC-360H	USC-360J	USC-360D
Processor	11th Gen Intel Celeron 6305E / Core i3-1115G4E / i5-1145G7E	Intel Celeron J6412	Rockchip RK3568 quad-core Cortex™-A55
Memory	1 x 260-pin SODIMM DDR4-3200 (up to 32 GB)		4GB onboard
Storage	1 x M.2 SSD		32GB onboard eMMC, Micro SD
Display	15.6" TFT LCD (1920 x 1080), 220nit (350nits optional)		
Touch Screen	Projected capacitive (P-CAP) touch control (flat glass)		
USB	3 x USB-C (One for DP, one for DC in, one for IO Hub), 2 x USB 3.0, 1 x USB 2.0 (broadside)		
Audio	2 x 2W speaker installed. 1 x Line out		
Power Supply	65W via power adapter		
Bus Expansion	1 x M.2 slot (for Wi-Fi and Bluetooth)		1 x Mini PCIe for 4G (optional)
Ethernet	1 x RJ-45 Intel Gigabit Ethernet (10/100/1000), I219LM	1 x RJ-45 Intel Gigabit Ethernet (10/100/1000), I226-V	1 x RJ45 10/100/1000 Mbps (PoE optional) Onboard WIFI 5+BT module (optional)
Operating System	Windows 10/11, Linux		Android 12, Linux
Cash Drawer	1 x (control 2 x CR via optional Y-cable) 24 V _{DC} default, 12 V _{DC} available upon request		
USB-C Input	20 V _{DC}		
IP rating	IP65 for front panel		
Dimensions (W x H x D)	381 x 230.4 x 31.5 mm		
Weight	4 Kg (Net); 4.5 Kg (Gross)		
Color	Black		
Operating Temperature	0 ~ 40 °C/32 ~ 104 °F		
Storage Temperature	-40°C, 60°C@95% humidity		
Relative Humidity	95%RH Max @40°C non-condensing		
Shock	10G peak acceleration (11 ms duration)		
Vibration	5 ~ 500 Hz 0.5 Grms, random		
Certification	FCC, CE, CCC, BSMI, UL, CB		
I/O on extension HUB	UP36 Power USB Hub: 2 x COM, 3 x 12V Power USB, 1 x 24V Power USC, 2 x USB 2.0, 1 x USB C, 1 x DC IN (powered by 180W adapter) UP37 COM Port Hub: 4 x COM (RJ-48 connector), 1 x USB C Input, 6 x USB 2.0 (powered by USC-360 65W adapter)		

Specifications (Cont.)

Model	USC-360H	USC-360J	USC-360D
Operating System	Windows 10/11, Linux	Windows 10/11, Linux	Android12, Linux
Common Controls (Reboot, Shutdown)	✓		✓
Remote Desktop	✓(VNC)		✓(VNC)
Audio Controls	✓		✓
Connection Status	✓		✓
Hardware Status	✓		✓
Hard Disk Status	✓		✓
Batch Operation Support	✓		✓
OTA Storage Management	FTP		FTP
OTA Software Updates	✓		✓
Software Watchlist	✓		✓
Software Start/Stop	✓		✓
Peripherals Watchlist	✓		✓

Outlook



Connect hub to stand, supports separate operation



Supports 75x75 VESA mounting




Integrate devices via USB-C



USC-360+2nd display

Dimensions

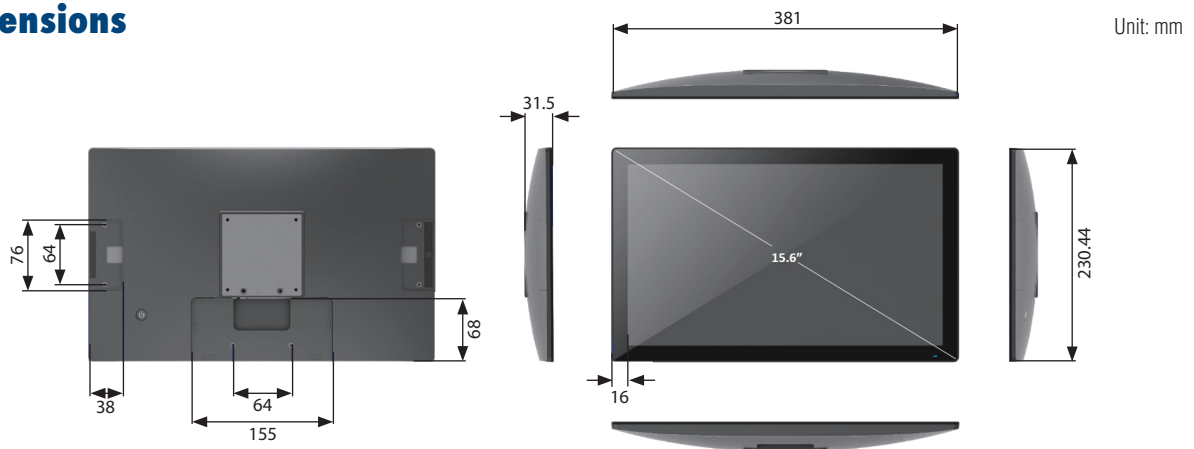

Ordering Information

PN	Description
USC-360HP-BCL40	15.6", CL 6305E, 4G, 128G, FHD, W/ stand, Blk
USC-360HP-BI340	15.6", i3-1115G4E, 8G, 128G, FHD, W/ stand, Blk
USC-360HP-BI541	15.6", i5-1145G7E, 8G, 256G, FHD, W/ stand, Blk
USC-360JP-BCL40	15.6", CL J6412, 4G, 128G, FHD, W/ stand, Blk
USC-360DP-BE110	15.6", RK3568, 4G, 32G, FHD, W/ stand, Android 12, Blk

POS Peripherals

PN	Description
USC-P05-B300	Barcode Scanner for USC-360 portrait
USC-P05-B301	Barcode Scanner for USC-360 IO side
96URP-F40U02-YHNGB	MSR007GH, USB, blk, slim, for USC-360
USC-P03-B300	5M Camera for USC-360
USC-P03-B301	RFID Scanner for USC-360
USC-P03-B302	LED LIGHT BAR for USC-360
USC-P03-B303	Finger Print Reader for USC-360
USC-M10G-BTC01	10.1" monitor, Glass, Blk, Rear mount, 60cm Type-C cable
USC-M10P-BTC00	10.1" monitor, PCAP, Blk, VESA75, no Cable
USC-M15WP-BST10	15.6" 16:9 monitor, PCAP, FHD, USB-C, HDMI, blk, VESA75, no ADP
USC-M15WP-BST13	15.6" 16:9 monitor, PCAP, FHD, USB-C, HDMI, stand, blk, no ADP
USC-P06-H02	USC-300 series UP37 extension hub, 4C6U (Powered by USC-360 65W adapter)
USC-P06-H01	USC-365 series UP36 extension hub (powered by 180W adapter)
XUSC365-ADP180WBB	ADP A/D 100-240V 180W 24V POWER DIN 4PIN (Powered for USC-P06-H01+USC-360 series)


Installation Accessories

Part Number	Description
EWM-W159M201E	new M.2 2230 WiFi5+BT5.0 module
96CB-POWER-B-1.8MB	Power cable 3P, CCC, 10A, 250V, 180 cm (China)
1700001524	Power cable 3P, UL, 10A, 125V, 180 cm (US, TW)
170203183C	Power cable 3P, 10A, 250V, 183 cm (EU)
1700018553	Power cable 3P, SAA, 2.5A, 250V, 183 cm (Australia)
1700025113-11	Power cable, ISI, 3P, 2.5A, 250V, 180 cm (India)
1700018409	Power cable, KCC, 2P, 2.5A, 250V, 183 cm (Korea, Russia)
170203180A	Power cable, BSI, 3P, 2.5A, 250V, 183 cm (UK)
1700008921	Power cable, PSE, 3P, 7A, 125V, 180 cm (Japan)
1750008603-01	PCB Ant.D.B 2.4+5G WIFI 250 BLK IPEX IV 1.13Main for USC-360H/J (usage: 2pcs/unit)
1750008953-01	Metal Ant.D.B 2.4+5G WLAN MHF1/113 BLK L350 for USC-360D (usage: 1pcs/unit)

Operating System


PN	Description
20708WX1ES0010	(Celeron)Img WIN10 LTSC 2021-ELE USC365 x64 V1.00 7MUI
20708WX1VS0015	(i5&i3)Img WIN10 LTSC 2021-VLE USC365 x64 V1.00 7MUI
20708WX1ES0015	(J6412) Img WIN10 LTSC 2021-ELE USC-360 x64 V1.00 8MUI

I/O Layout

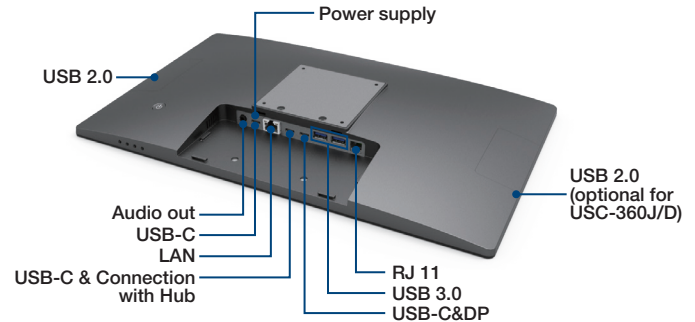

HUB I/O Layout

UP37 COM Hub

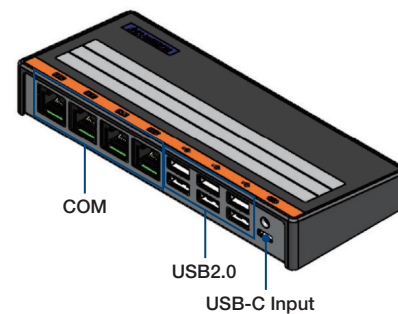

UP36 Power USB Hub

